


带盖刀型闸阀

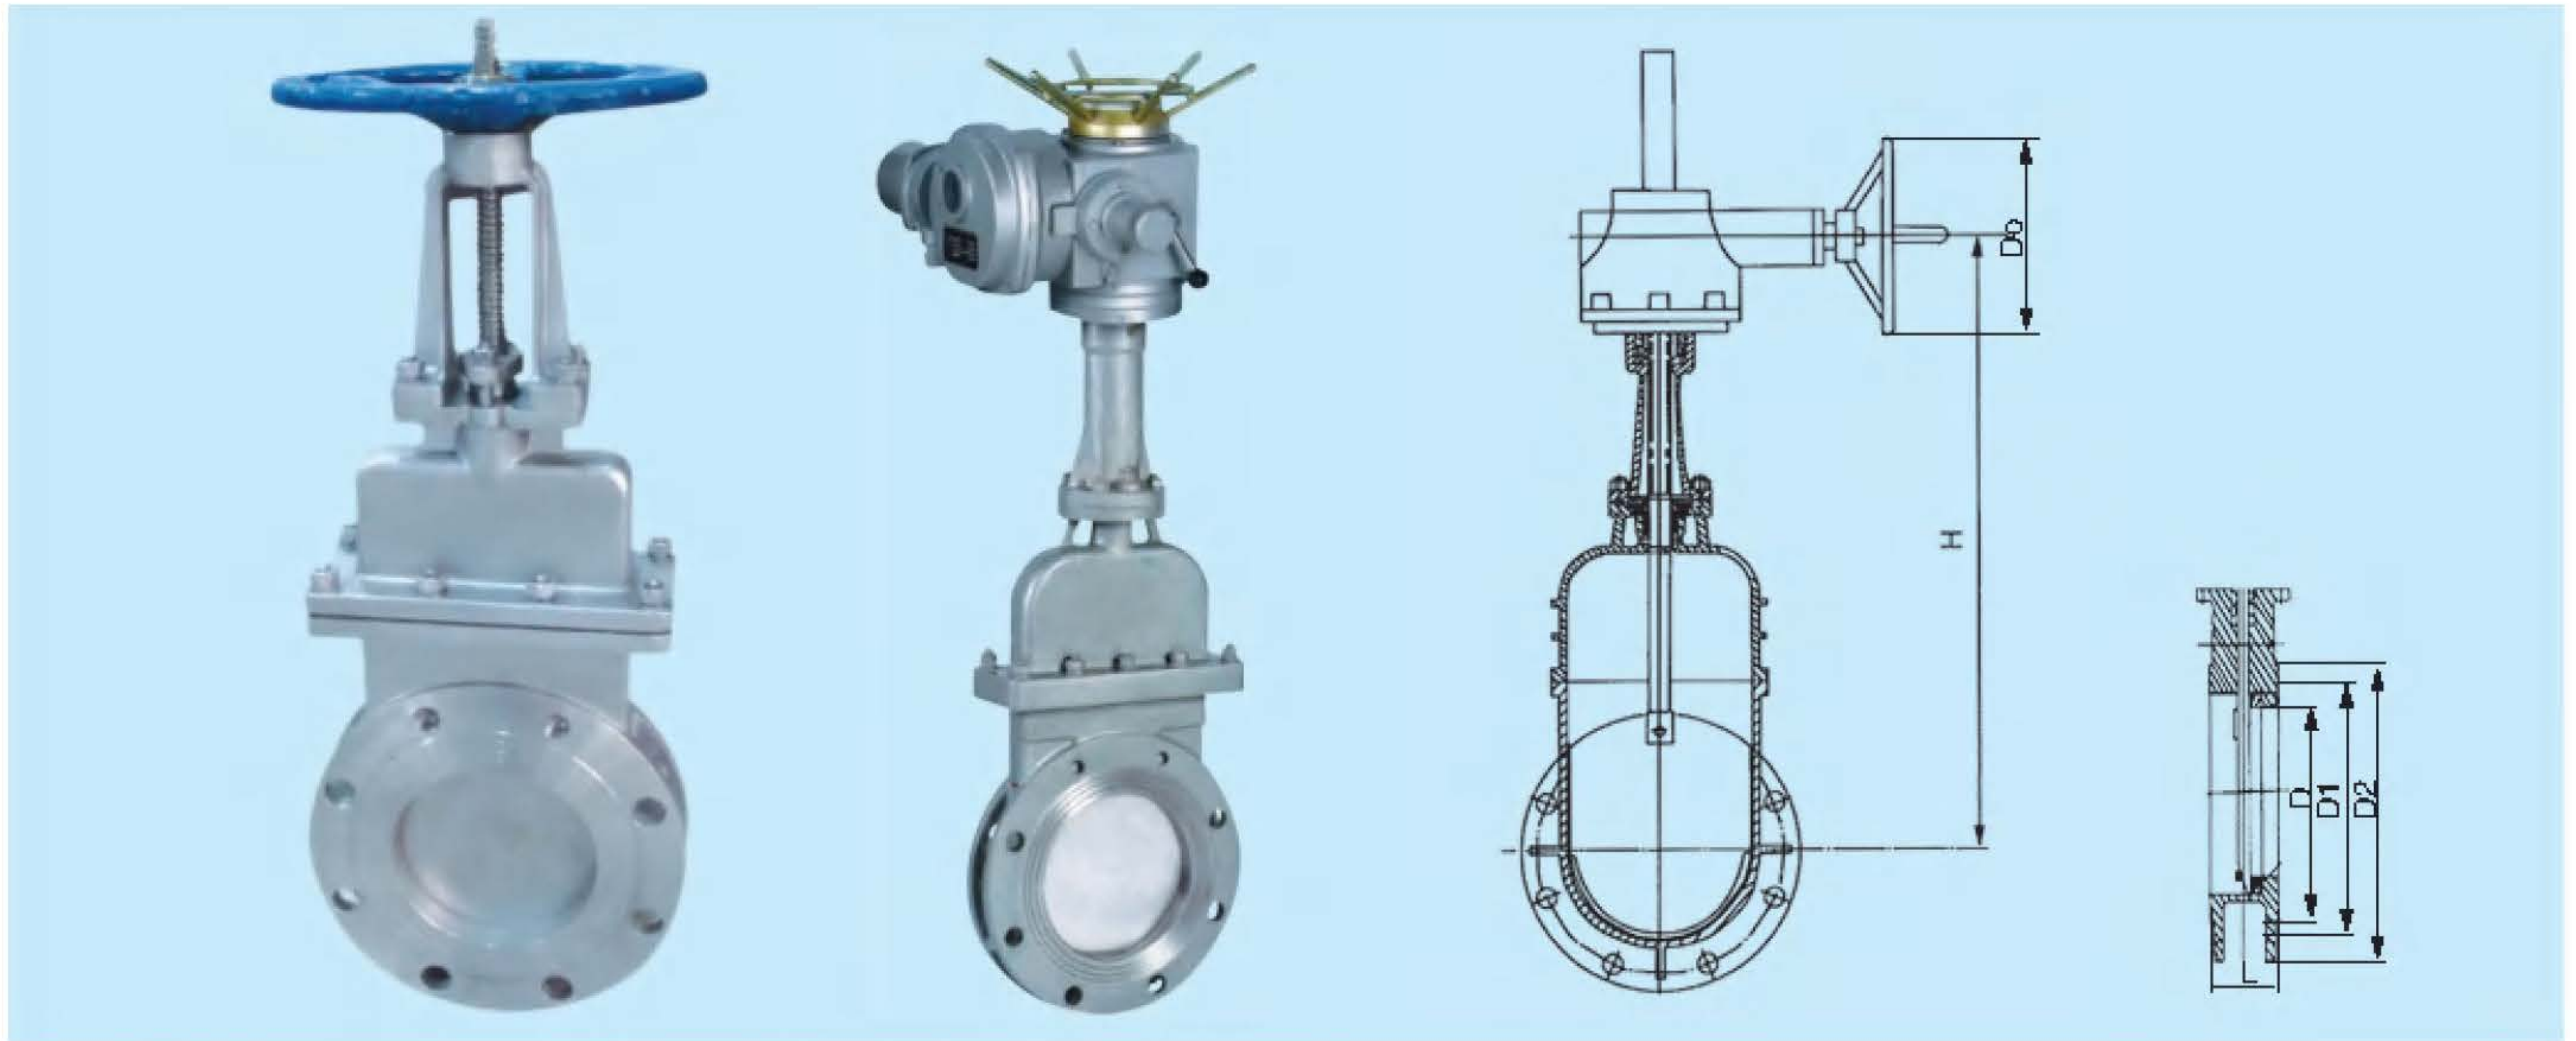

主要性能规范 The main performance specification

公称压力 Nominal pressure (MPa)	试验压力 Test pressure (MPa)		工作温度 Working temperature (°C)	适用介质 Applicable medium
	壳体 shell	密封 seal		
0.6	0.9	0.66	橡胶 rubber ≤ 80°C	空气、矿浆、污水、煤浆、烟灰、渣水混合物 Air, pulp, sewage water, coal slurry, ash and slag mixture
1.0	1.5	1.1	Y/H ≤ 425°C	
1.6	2.4	1.8	Y/H ≤ 425°C	

主要零部件材质 Main parts material

体、盖 Body and cover	闸板 ram	阀杆 stem	密封面 Sealing surface
不锈钢、碳钢、灰铸铁 Stainless steel, carbon steel, gray cast iron	不锈钢、碳钢 Stainless steel, carbon steel	不锈钢 Stainless steel	橡胶、四氟、不锈钢、硬质合金 Rubber, ptfе and stainless steel, hard alloy

主要外形尺寸 (mm) Main External and Connection Dimension

型号 type	DN	L	D	D1	D2	H	N-M	Do
PZ73X/F/H/W -10	150	72	280	240	210	580	8-M20	280
	200	81	335	295	265	710	8-M20	360
	250	86	390	350	320	800	12-M20	360
	300	102	440	400	368	960	12-M20	400
	350	102	500	460	420	1100	16-M20	400
	400	110	565	515	482	1220	16-M22	400
	450	122	615	565	532	1350	20-M22	550
	500	130	670	620	585	1460	20-M22	550
	600	132	780	725	685	1680	20-M22	550
	700	150	895	840	800	1850	24-M27	600
	800	155	1010	950	905	2180	24-M30	600
900	160	1110	1050	1005	2280	28-M30	600	