


旋启式止回阀

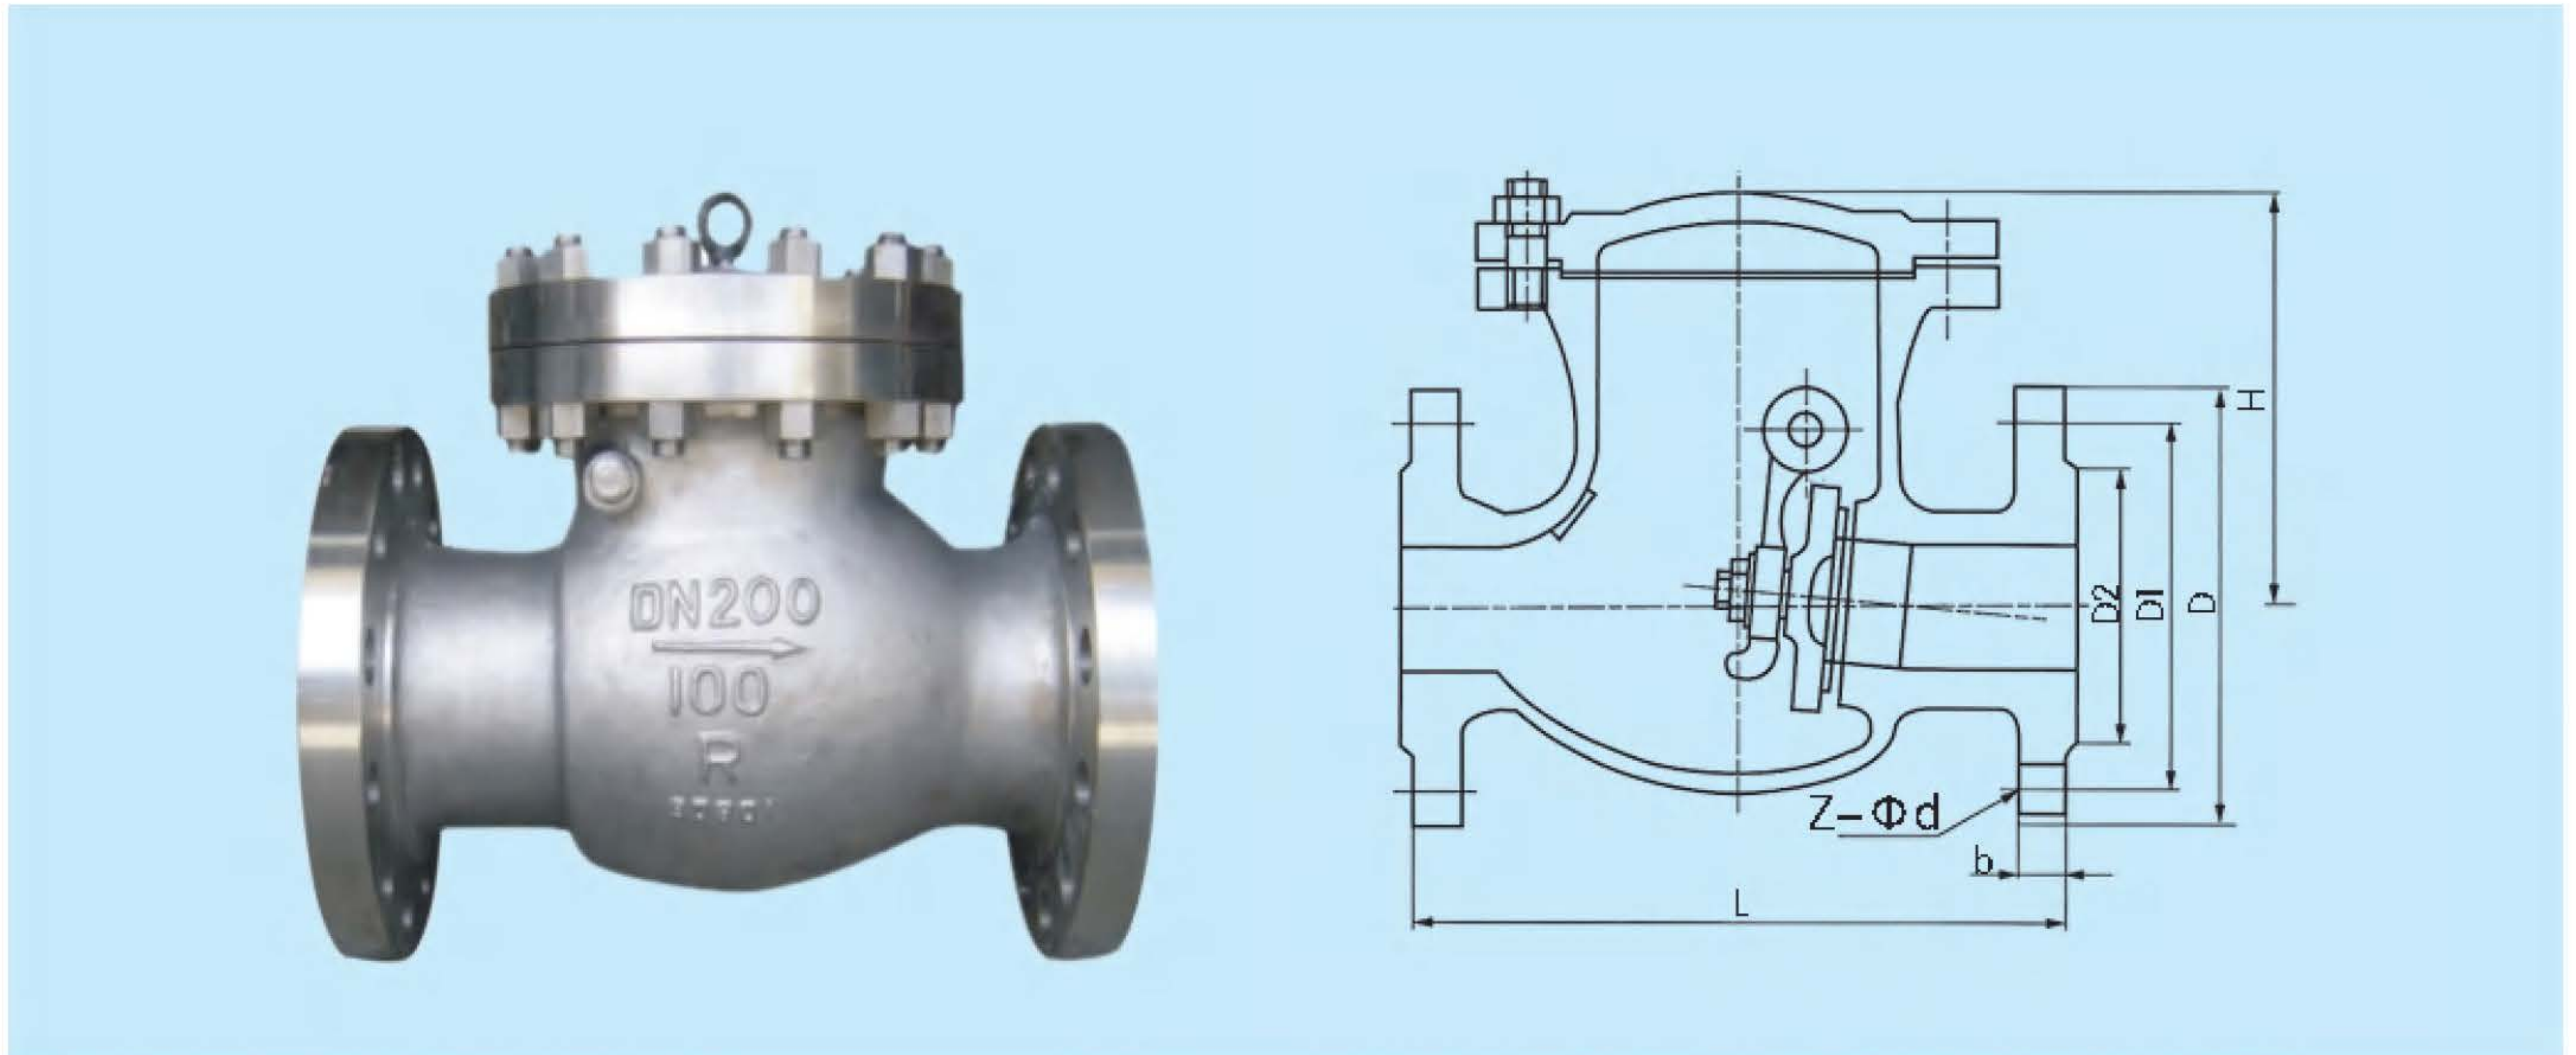

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	b	Z-Φd	H
H44H H44Y H44W -16C/P/R/I	50	230	160	125	100	16	4-Φ18	135
	65	290	180	145	120	18	4-Φ18	142
	80	310	195	160	135	20	8-Φ18	165
	100	350	215	180	155	20	8-Φ18	180
	125	400	245	210	185	22	8-Φ18	210
	150	480	280	240	210	24	8-Φ23	233
	200	500	335	295	265	26	12-Φ23	304
	250	550	405	355	320	30	16-Φ25	348
	300	650	460	410	375	30	16-Φ25	390
	350	750	520	470	435	34	16-Φ25	430
	400	850	580	525	485	36	16-Φ30	468
	450	950	640	585	545	40	20-Φ30	523
500	1025	705	650	608	44	20-Φ34	525	
H44H H44Y H44W -25P/R/I	50	230	160	125	100	20	4-Φ18	160
	65	290	180	145	120	22	8-Φ18	175
	80	310	195	160	135	22	8-Φ18	185
	100	350	230	190	160	24	8-Φ23	220
	125	400	270	220	188	28	8-Φ25	248
	150	480	300	250	218	30	8-Φ25	276
	200	550	360	310	278	34	12-Φ25	350
	250	650	425	370	332	36	12-Φ30	410
	300	750	485	430	390	40	16-Φ30	430
	350	850	550	490	448	44	16-Φ34	518
	400	950	610	550	505	48	16-Φ34	560
	450	1025	660	600	555	50	20-Φ34	582
500	1150	730	660	610	52	20-Φ41	618	

旋启式止回阀

主要外形尺寸 (mm) Main External and Connection Dimension

型号 Type	DN	L	D	D1	D2	b	Z-Φd	H
H44H H44Y H44W -40P/R/I	50	230	160	125	100	20	4-Φ18	169
	65	290	180	145	120	22	8-Φ18	173
	80	310	195	160	135	22	8-Φ18	185
	100	350	230	190	160	24	8-Φ23	220
	125	400	270	220	188	28	8-Φ25	248
	150	480	300	250	218	30	8-Φ25	270
	200	550	375	320	282	38	12-Φ30	342
	250	650	445	385	345	42	12-Φ34	401
	300	750	510	450	408	46	16-Φ34	423
	350	850	570	510	465	52	16-Φ34	455
H44H H44Y H44W -64P/R/I	50	300	175	135	105	26	4-Φ23	177
	65	340	200	160	130	28	8-Φ23	197
	80	380	210	170	140	30	8-Φ23	212
	100	430	250	200	168	32	8-Φ25	248
	125	500	295	240	202	36	8-Φ30	296
	150	550	340	280	240	38	8-Φ34	330
	200	650	405	345	300	44	12-Φ34	385
	250	775	470	400	352	48	12-Φ41	445
	300	900	530	460	412	54	16-Φ41	474
	350	1025	595	525	475	60	16-Φ41	514
H44H H44Y H44W -100P/R/I	50	300	195	145	112	28	4-Φ25	192
	65	340	220	170	138	32	8-Φ25	207
	80	380	230	180	148	34	8-Φ25	235
	100	430	265	210	172	38	8-Φ30	265
	125	500	310	250	210	42	8-Φ34	313
	150	550	350	290	250	46	12-Φ34	360
	200	650	430	360	312	54	12-Φ41	420
	250	775	500	430	382	60	12-Φ41	480
	300	900	585	500	442	70	16-Φ48	540